

ES-0800GB

8 Port Industrial Unmanaged Gigabit Ethernet Switch



- 8x Gigabit Ethernet ports
- Built for harsh environments and wide temperature range application
- Relay Output with Current Carrying Capacity
- IP30 housing
- DIN-Rail Mounting



Specifications

Technology

Standards	IEEE 802.3 10BaseT IEEE 802.3u 100BaseTX IEEE 802.3ab 1000BaseT IEEE 802.3x Flow Control
------------------	---

Processing Type	Store and Forward
------------------------	-------------------

Switch Properties

Switch Fabric	16Gbps
----------------------	--------

Priority Queues	-
------------------------	---

MAC Table Size	4K
-----------------------	----

Packet Buffer	1.5Mbits
----------------------	----------

Interface

RJ45 Port	8x 10/100/1000T(x), auto negotiation speed duplex mode, auto MDI/MDI-X
------------------	--

LED Indicators	Per unit: PWR1, PWR2, Fault Ports: Link/Active(Green)
-----------------------	--

Alarm Contact	1x relay output with current carrying capacity of 1A @ 24 VDC
----------------------	---

Power Requirements

Operation Voltage	12-48VDC, redundant dual inputs
--------------------------	---------------------------------

Connection	1x removable 6-contact terminal block
-------------------	---------------------------------------

Power Consumption	0.18A@24VDC
--------------------------	-------------

Protection	Overload Current Protected, Reverse Polarity Protected
-------------------	--

Mechanical Construction

Enclosure	SECC
------------------	------

Protection Class	IP30
-------------------------	------

Dimensions	29x140x98 mm (WxHxD)
-------------------	----------------------

Weight	0.75 kg
---------------	---------

Mounting	DIN-Rail Mounting
-----------------	-------------------

Environmental Limits

Operating Temperature	Extended: -40°C ~ 75°C (-40°F ~ 167°F)
------------------------------	--

Storage Temperature	-40°C ~ 85°C
----------------------------	--------------

Ambient Relative Humidity	5 to 95%, (Non-Condensing)
----------------------------------	----------------------------

Regulatory Approvals

EMI	FCC Part 15 Subpart B Class A CE EN 55032 Class A
------------	--

EMS	IEC61000-4-2 (ESD) IEC61000-4-3 (RS) IEC61000-4-4 (EFT) IEC61000-4-5 (Surge) IEC61000-4-6 (CS) IEC61000-4-8 (Magnetic Field)
------------	---


Free Fall	IEC60068-2-32
------------------	---------------

Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	IEC 61000-6-2

MTBF	>100,000 hours
Warranty	5 Years

Features with star(*) implies those are under development.
 In a continuing effort of improvement and updated technology, product specifications are subject to change without notice.

Dimensions (unit = mm)

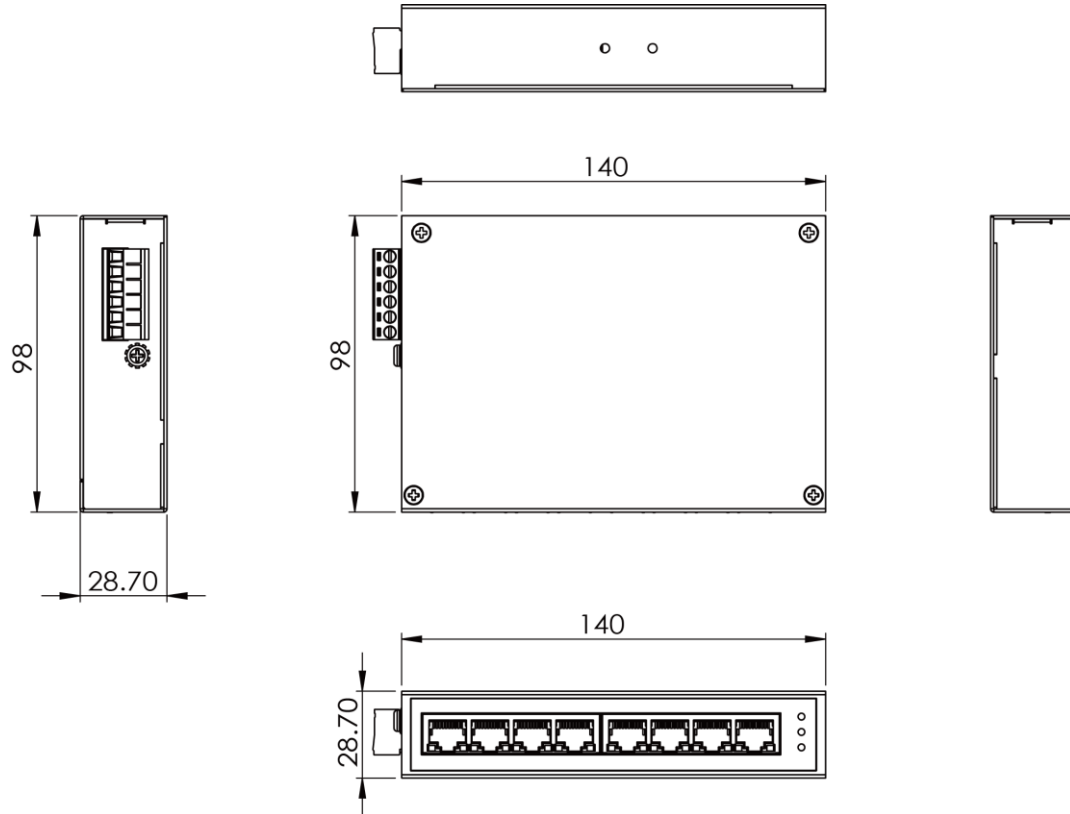

Ordering Information

ES-0800GB-T	8 Port Industrial Unmanaged Gigabit Ethernet Switch - 8x 10/100/1000T(x) - Operating Temperature: -40°C ~ 75°C (-40°F ~ 167°F)
--------------------	--

Optional Accessories

NDR-75-24	75W Industrial DIN-Rail Power Supply, 24VDC (metal case)
NDR-75-48	75W Industrial DIN-Rail Power Supply, 48VDC (metal case)